
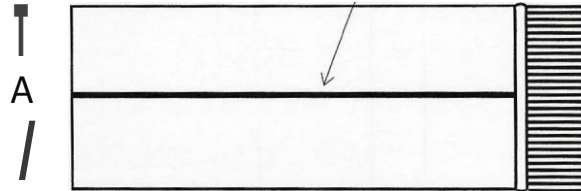


## GALVANIZED ROUND PIPE-RP01, RP0S

Snap-Lock or Button-Lock Seam



1.75" Crimp with 0.25" raised stop bead

DIAM. (A)	CI RCUMF.	X-SECAREA	CFM (Note A)	GAUGES
3	9.44	7.07	<25	WA,30,28,26
4	12.58	12.56	38	WA,30,28,26,24
5	15.72	19.63	68	WA,30,28,26,24
6	18.86	28.26	110	WA,30,28,26,24,22
7	22.00	38.47	165	30,26,24,22
8	25.14	50.24	236	30,26,24,22
9	28.28	63.59	308	30,26,24,22
10	31.42	78.50	409	30,28,26,24,22
12	37.70	113.04	688	30,28,26,24,22
14	43.98	153.86	1 010	30,28,26,24,22
16	50.26	200.96	1 475	30,28,26,24,22
18	56.54	254.34	1 980	28,26,24,22
20	62.82	314.00	2,610	28,26,24,22
22	69.10	379.94	3,190	26,24,22
24	75.38	452.16	4,095	26,24,22
26	81.66	530.66	5,100	26,24,22
28	87.94	615.44	6,450	24,22
30	94.22	706.50	7,610	24,22
32	100.50	803.84	8 900	24,22

Part Number designations

**RPOIXXYZZ, RPOSXYZZ (Unboxed 3"-8")**

**Where:** XX = DIAMTER (03-36)

YY = GAUGE (WA, 30, 28, 26, 24, 22)

ZZZ = LENGTH (024, 036, 048, 060, 120)

**Options:** Snap-Lock, Button-Lock, Beaded, Boxed 4"-8"

**NOTES:** A. 0.10 Friction loss;Inches of Water per 100 ft of duct

B. All Dimensions in inches

PROJECT: \_\_\_\_\_ COMPANY: \_\_\_\_\_ DATE: \_\_\_\_\_

LOCATION: \_\_\_\_\_ SUBMITTED BY: \_\_\_\_\_