


Bellmouth Take-Off (BTOB & BTONB)

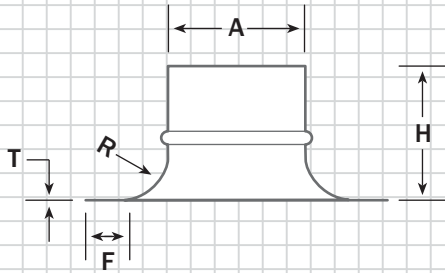

Key

A = Pipe size (small end) H = Overall height
 R = Radius T = Flange thickness (gauge)
 F = Flange length

Materials Available

- Galvanized
- Sizes 4"-12" available in 24 gauge, stamped
- Sizes 14"-36" available in 20 gauge, spun

Options Available

- Sizes 4" to 36"
- Dampers (see BTOBD spec)
- Peel & stick gasket is standard on BTOB
- 2" standoff
- Bead or no bead

Dimensions

Size	(A)	(R)	(F)	(H)	(T)	Gauge	Weight Each
4"	3 7/8"	1.0"	1"	2.50"	.027"	24 ga.	0.4#
5"	4 7/8"	1.0"	1"	3.00"	.027"	24 ga.	0.7#
6"	5 15/16"	1.0"	1"	4.25"	.027"	24 ga.	0.8#
7"	6 7/8"	1.0"	1"	3.50"	.027"	24 ga.	0.7#
8"	7 15/16"	1.0"	1"	4.25"	.027"	24 ga.	1.1#
9"	8 7/8"	1.0"	1"	3.50"	.027"	24 ga.	0.9#
10"	9 15/16"	1.0"	1"	4.75"	.027"	24 ga.	1.5#
12"	11 15/16"	1.0"	1"	5.50"	.027"	24 ga.	2.0#
14"	13 7/8"	1.0"	.75"	6.50"	.034"	20 ga.	3.2#
16"	15 7/8"	2.0"	.75"	8.50"	.034"	20 ga.	4.4#
18"	17 7/8"	2.0"	1"	8.50"	.034"	20 ga.	5.4#
20"	19 7/8"	2.0"	1"	8.50"	.034"	20 ga.	6.2#
22"	21 7/8"	2.0"	1"	8.50"	.034"	20 ga.	7.0#
24"	23 7/8"	2.0"	1"	8.50"	.034"	20 ga.	7.4#
26"	25 7/8"	2.0"	1"	8.50"	.034"	20 ga.	8.0#
28"	27 7/8"	2.0"	1"	8.50"	.034"	20 ga.	8.0#
30"	29 7/8"	2.0"	1"	8.50"	.034"	20 ga.	10.0#
32"	31 7/8"	2.0"	1"	8.50"	.034"	20 ga.	10.0#
34"	33 7/8"	2.0"	1"	8.50"	.034"	20 ga.	11.0#
36"	35 7/8"	2.0"	1"	8.50"	.034"	20 ga.	11.0#

- 4", 5", 7" & 9" are short BTO's
- Peel & stick gasket is not available on 18"-36"